


LTSA-ALB12KWH

- 1 Long Lifespan
- 2 Floor/Wall-Mounted Install
- 3 Reliable Performance
- 4 90%DOD

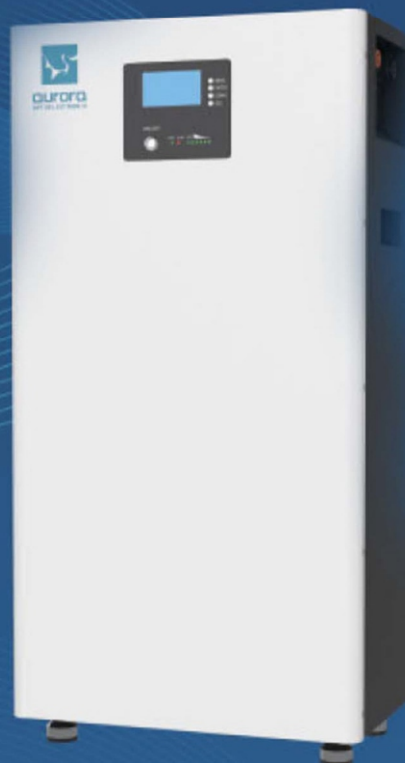

MODEL	YF-LFP-12.2KWH
NOMINAL VOLTAGE RANGE	48V-57.6V
RECOMMEND CHARGE & DISCHARGE CURRENT	100A
MAX. CHARGE & DISCHARGE CURRENT	120A@20S
DISCHARGE DOD	90%
INGRESS PROTECTION	IP20
CYCLE TIMES	≥6000@25°C
WORKING TEMPERATURE	-10°C~50°C
STORAGE TEMPERATURE	0°C~50°C
WARRANTY	6 YEARS
CERTIFICATION	CE, IEC62619(Cell&Pack), UL1973, UN38.3
COMMUNICATION PORT	RS485/CAN
MAX IN PARALLEL	8PCS
NET WEIGHT	118KG
GROSS WEIGHT	132KG
PRODUCT DIMENSION	820*430*255mm
PACKAGE DIMENSION	870*515*415mm