

Round Baler



MODEL: MRB0870 / MRB0850

It can automatically complete the picking up, baling and balling of pasture, rice, wheat and corn stalks. There are some characteristics in picking up clean, adjustable bale density, high working efficiency and strong applicability.

It greatly reduces the labor intensity of farmers, improves production efficiency and widely welcomed creating favorable conditions for farmers income and

上海STAR

Specifications

Specifications :

MODEL	MRB0850	MRB0870
Bale size	50*70cm	60*70cm
Baler Size(cm)	115*130*120cm	130*130*135cm
Weight(kg)	390	440
Bale Weight(kg)	25	30
Pickup width(cm)	70.5	70.5
Number of Row Tines	4	4
Working Speed(km/h)	2~5	2~5
Matched Power (kw/hp)	22.1~36.7/30~50	22.1~36.7/30~50
PTO Shaft Speed(r/min)	540	540

Round Baler

Why choose Small Size



With compact design and 3point hitch direct attaching, it can easily turn in a small field in comparison with traction type hay baler. Light body enable works on wet fields as well. Main use for high quality baling of Alfalfa, Rice straw and wheat straw

Easy handling bale



Bale size is 70cm width x 50cm diameter for MRB0850, 70cm x 60cm for MRB0870, and The gearbox output is protected by shear bolt. When overload occurs, shear bolt will cut itself and protect the machine from damage.

Rotor Flush



MRB0850



MRB0870


We made all rotor flushes with enough thickness for strength. They are not easy to break and good abrasion resistance.

Durable steel rollers



Highly durable steel rollers are adopted for the compression system. Power fluctuation is less than hay square baler, stable and noiseless operation can be expected. We adopts the high strength bearings which it is a world famous brand of NTN. So that roller isn't been damaged.

The high mobility and performance Light and compact body enables you to work in small field

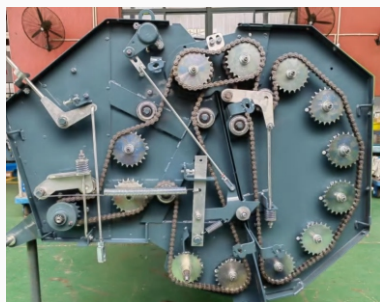

1. With high strength chains, the service life is prolonged, and high collection efficiency.
2. It does not need to be replaced frequently, thereby saving the cost of use.



The tire tread can be adjusted not to trace the tractor's wheel trace.



Brand: STAR

We developed special pump for round baler, its good sealing performance and long service life



The gearbox output is protected by shear bolt. When overload occurs, shear bolt will cut itself and protect the machine from damage.